
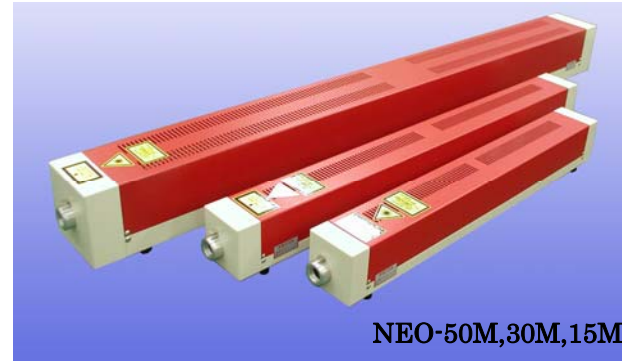


## “NEOARK” Angular Type He-Ne Laser

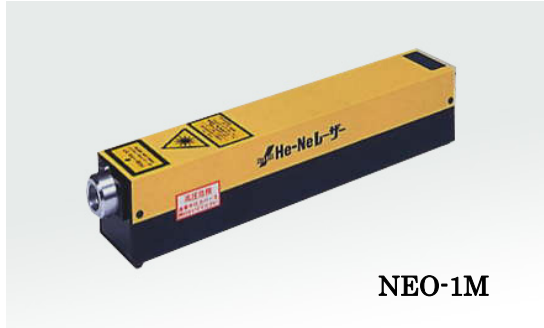

Specification		Wavelength (nm)	Power (mW)	Power Stabilization (%/hour)	Beam Diameter (phi in mm 1/e <sup>2</sup> )	Beam Divergence (mrad)	Polarization (Extinction)	Power Required (VA) ***	Size/Weight Oscillating Part	Size/Weight Power supply	JIS Safety Classification
NEO-1M	*	632.8	>0.6	+/- 5.0	0.8	1.1	Random	15VA	48x60x300mm 1.4kg	Incorporated	Class 2
NEO-15MS	**		>15	+/- 2.0	1.3	0.6	Linear (1000 : 1)	100VA	80x83x700mm 6.3kg	120x270x300mm 5.7kg	Class 3B
NEO-30MS			>30	+/- 2.0	1.5	0.6		130VA	80x83x900mm 6.3kg		
NEO-50MS			>50	+/- 2.5	1.8	0.5		180VA	200x200x1760mm 11kg	350x160x315mm 6.5kg	

Remarks:

\* Angular type, power supply incorporated type

\*\*\* Electric source: AC100V +/- 10%, 50/60Hz

\*\* Angular type, high power type

Electric transformer from AC200/220V to AC100V shall be arranged by a customer.

# Specification (mentioned above) may be changed without any previous notice.